



Feb.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

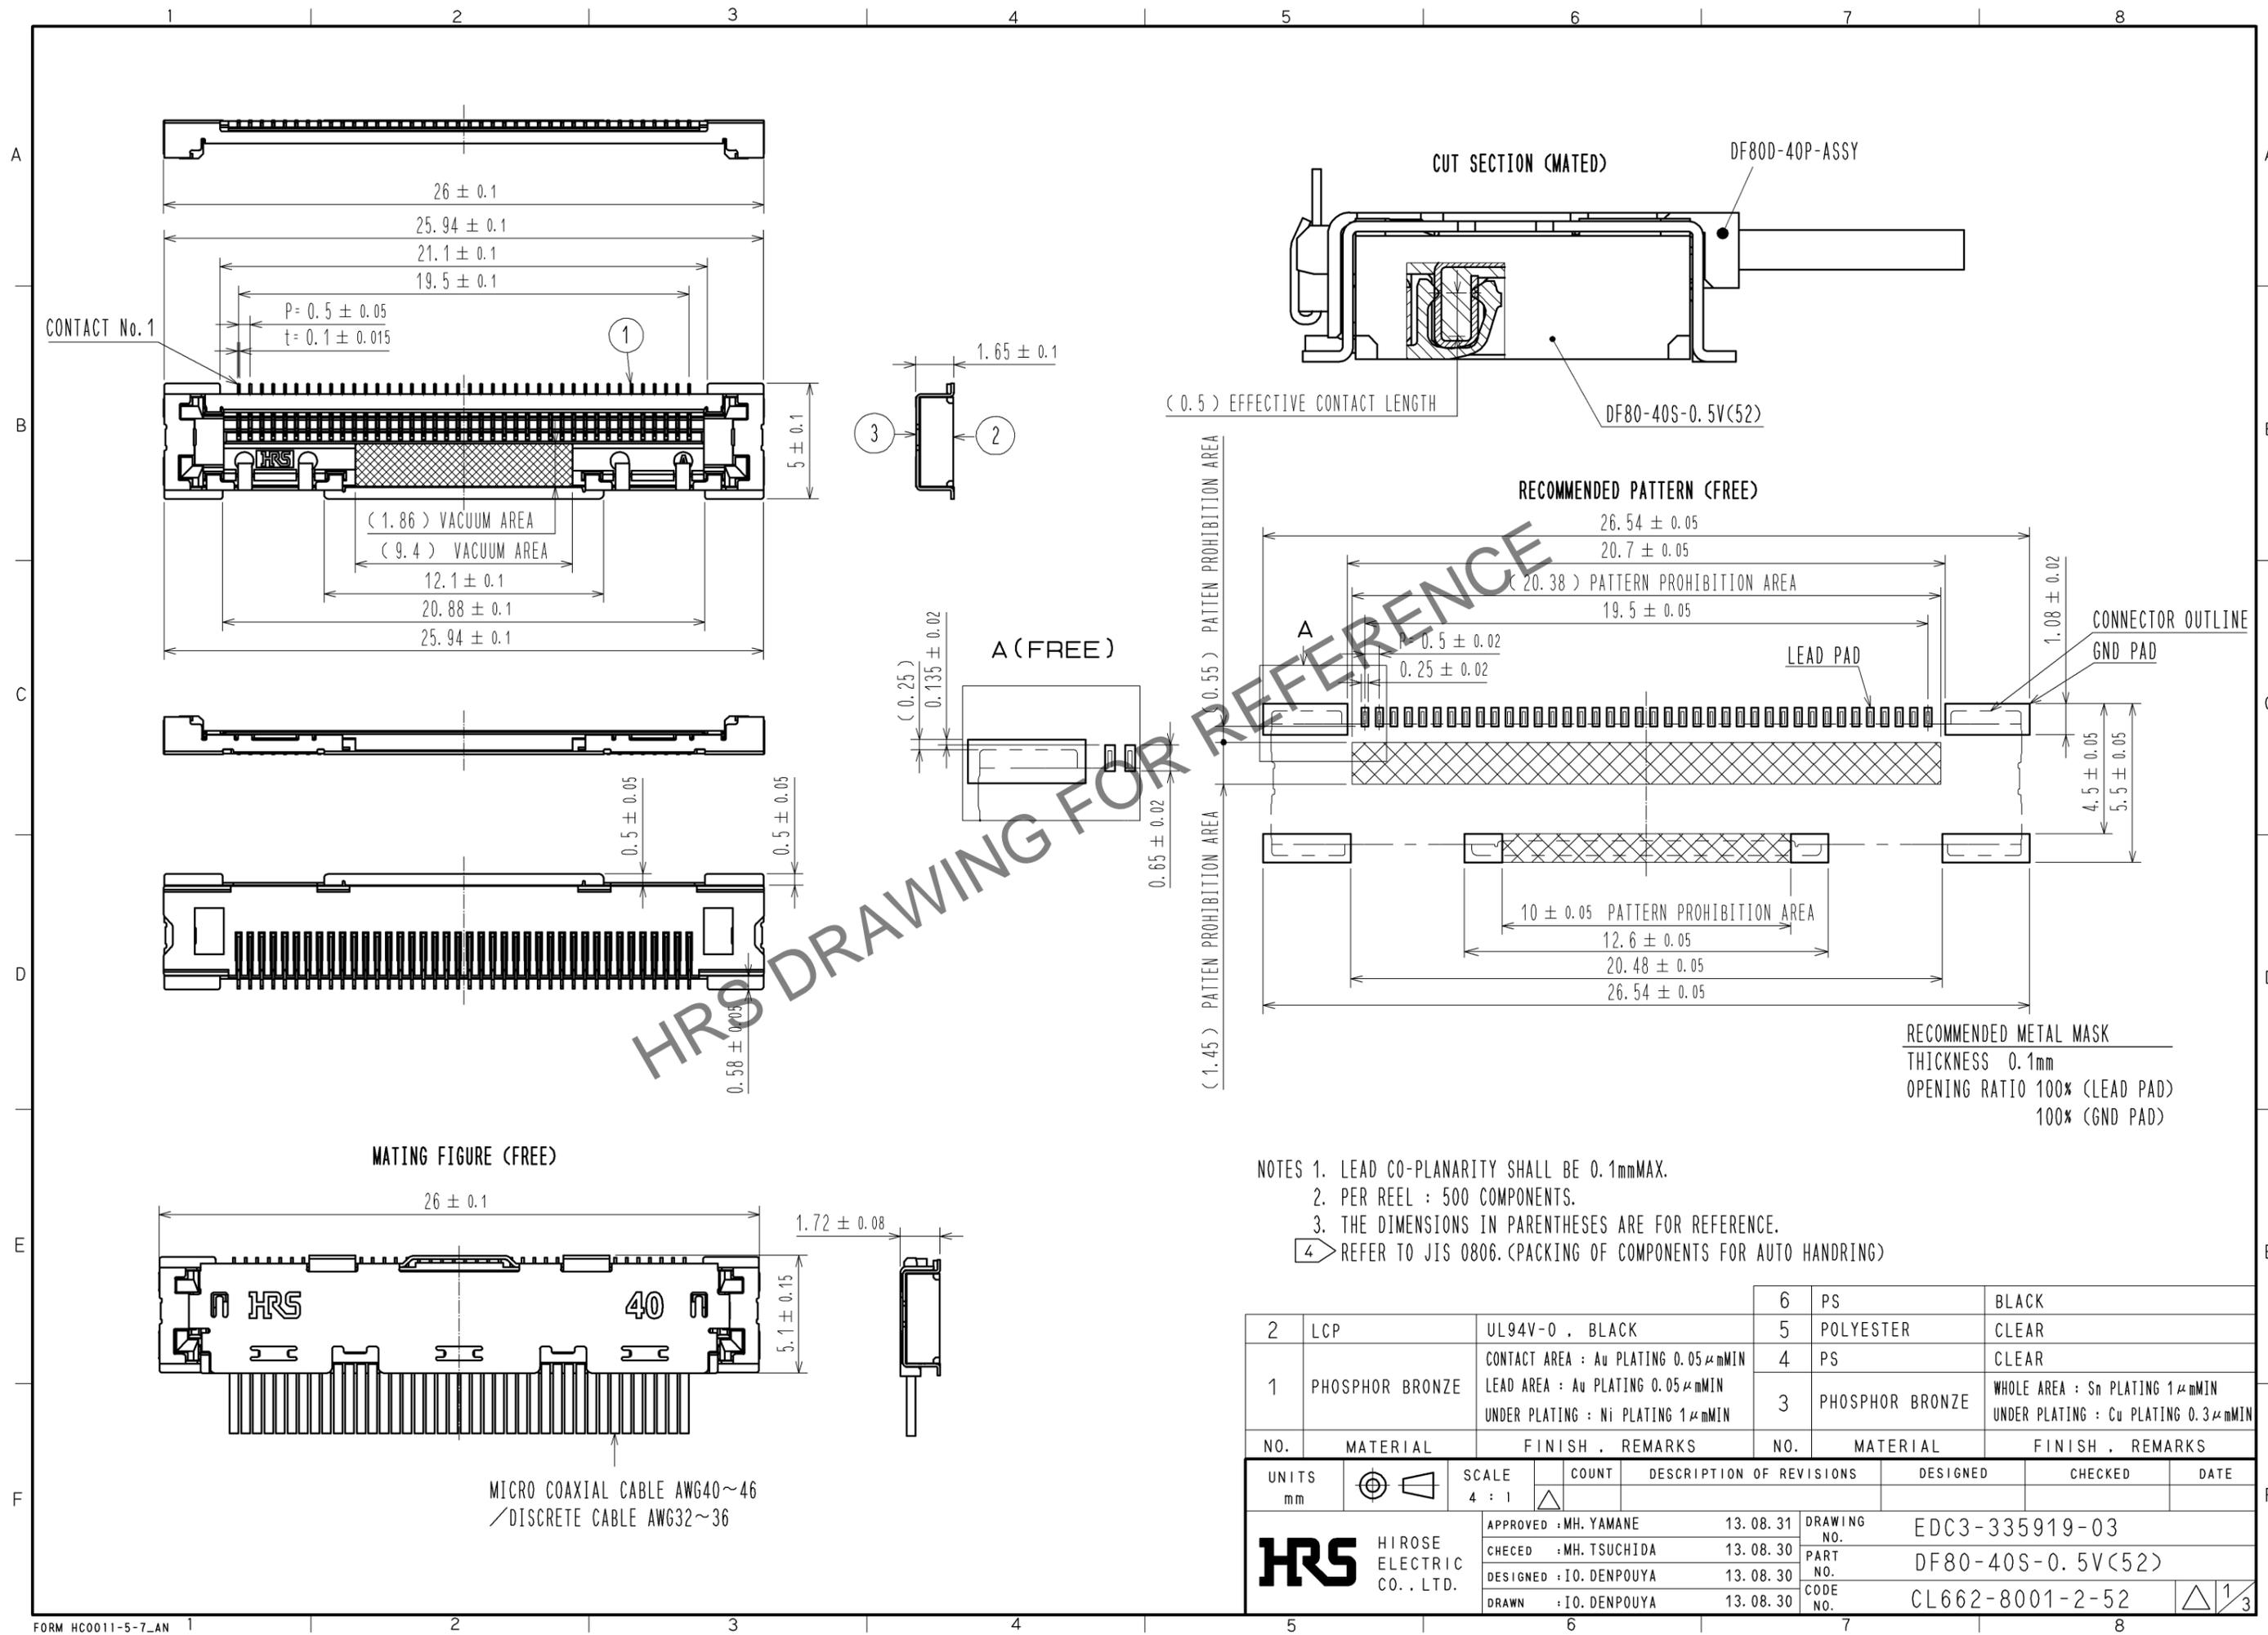

2	LCP	UL94V-0 , BLACK	6	PS	BLACK
1	PHOSPHOR BRONZE	CONTACT AREA : Au PLATING 0.05μmMIN LEAD AREA : Au PLATING 0.05μmMIN UNDER PLATING : Ni PLATING 1μmMIN	5	POLYESTER	CLEAR
			4	PS	CLEAR
			3	PHOSPHOR BRONZE	WHOLE AREA : Sn PLATING 1μmMIN UNDER PLATING : Cu PLATING 0.3μmMIN
NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS
UNITS mm		SCALE 4 : 1	COUNT 	DESCRIPTION OF REVISIONS	
HRS HIROSE ELECTRIC CO., LTD.		APPROVED : MH. YAMANE 13.08.31	DESIGNED	EDC3-335919-03	
		CHECED : MH. TSUCHIDA 13.08.30	CHECKED	PART NO. DF80-40S-0.5V(52)	
		DESIGNED : IO. DENPOUYA 13.08.30	DATE	CODE NO. CL662-8001-2-52	
		DRAWN : IO. DENPOUYA 13.08.30			

Feb.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

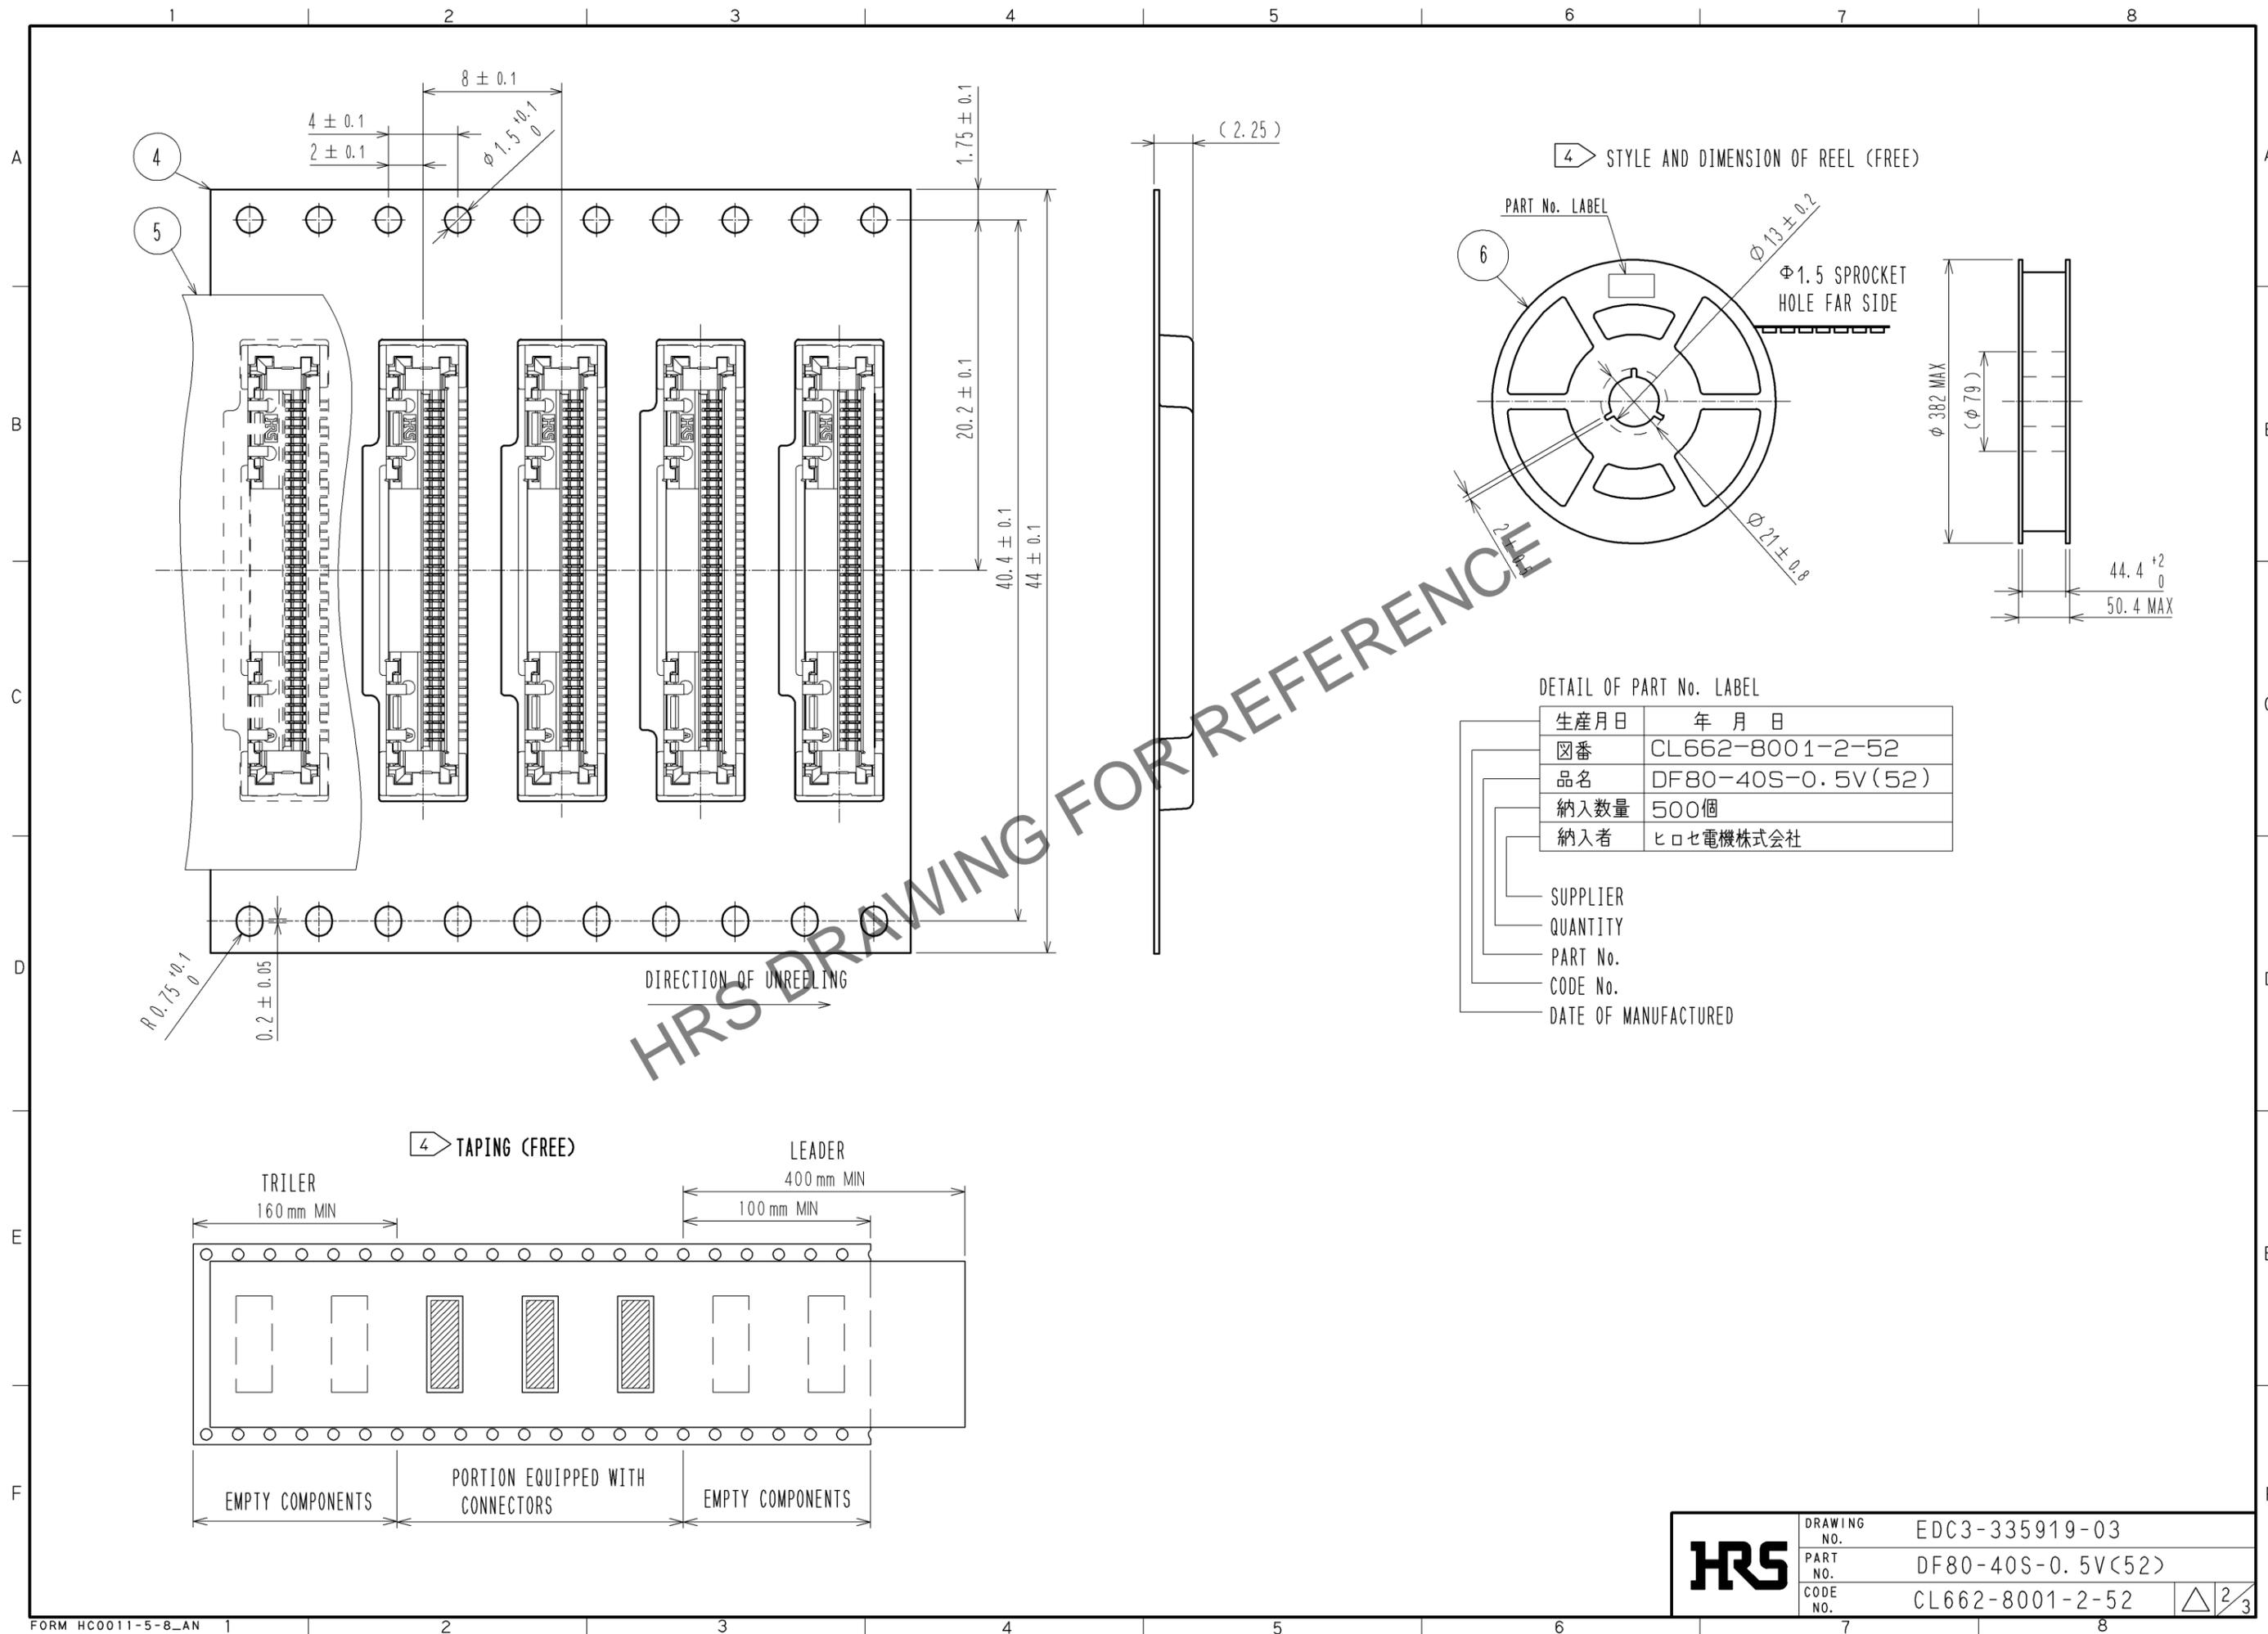

DETAIL OF PART No. LABEL

生産月日	年月日
図番	CL662-8001-2-52
品名	DF80-40S-0.5V(52)
納入数量	500個
納入者	ヒロセ電機株式会社

SUPPLIER
 QUANTITY
 PART No.
 CODE No.
 DATE OF MANUFACTURED

HRS	DRAWING NO.	EDC3-335919-03
	PART NO.	DF80-40S-0.5V(52)
	CODE NO.	CL662-8001-2-52

2/3

Feb.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.


[CONNECTOR INSERTION]

1. ALIGN THE PLUG CONNECTOR TO THE GUIDES ON PCB CONNECTOR AND INSERT.
2. APPLY EVEN FORCE TO THE PLUG CONNECTOR SURFACE AND FEEL TACTILE CLICK FOR COMPLETE LOCK.


SUPPLEMENTATION

TOTAL HEIGHT IS KEPT WITHIN THE HEIGHT OF MATED CONNECTORS BY LAYING DOWN THE PULL TAB AS SHOWN.


PROCEDURE 1

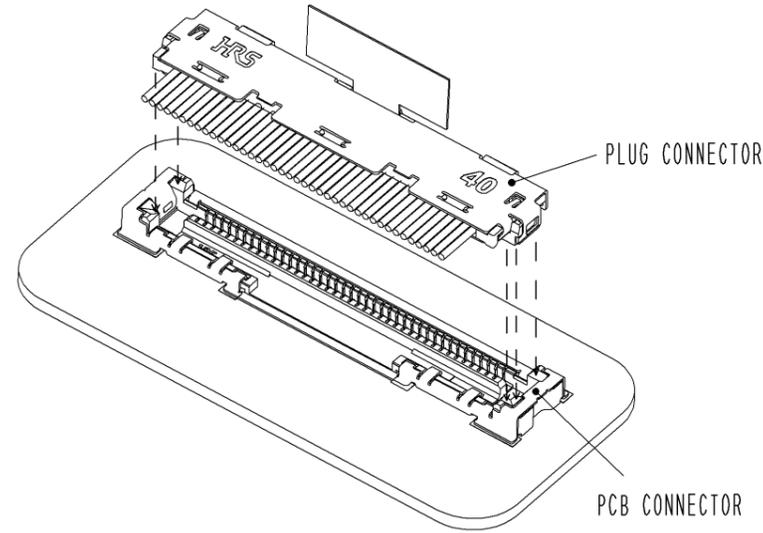

PROCEDURE 2

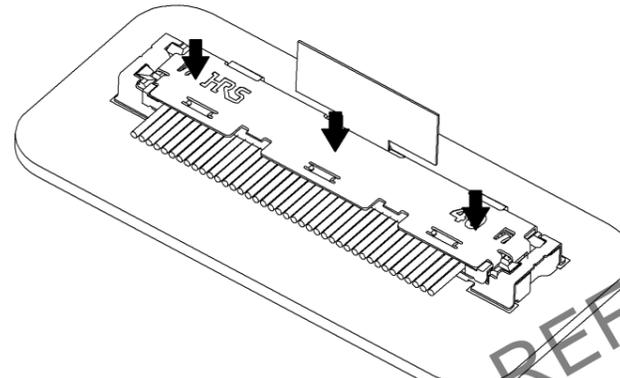

SUPPLEMENTATION :
METHOD OF STORING PULL TAB

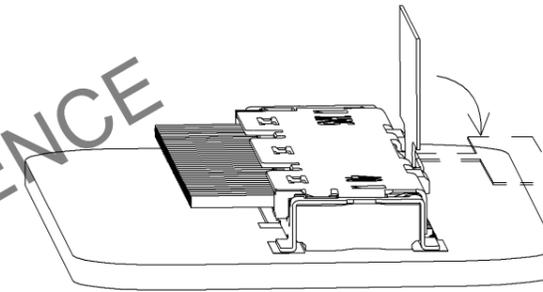


[CONNECTOR WITHDRAWAL]

<WITH PULL TAB>


BY PULLING UP THE TAB TO THE DIRECTION INDICATED WITH THE ARROW, PLUG CONNECTOR IS RELEASED.

<WITHOUT PULL TAB>

BY HOOKING THE PLUG CONNECTOR AT THE POSITION SHOWN WITH FINGER AND PULLING UP, PLUG CONNECTOR IS RELEASED.

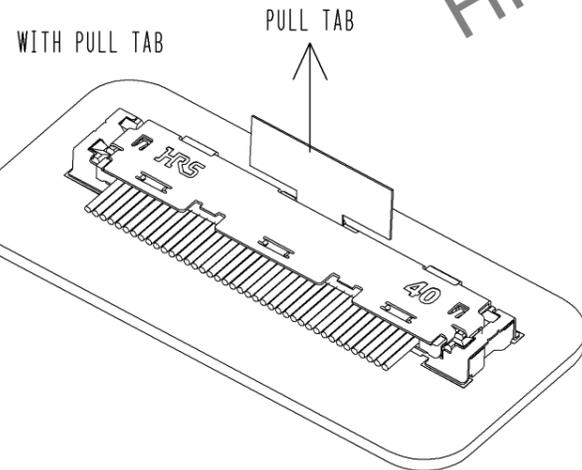

WITHOUT PULL TAB

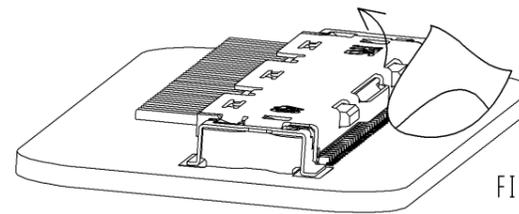

HRS DRAWING FOR REFERENCE

HRS	DRAWING NO.	EDC3-335919-03	△ 3/3
	PART NO.	DF80-40S-0.5V<52>	
	CODE NO.	CL662-8001-2-52	