
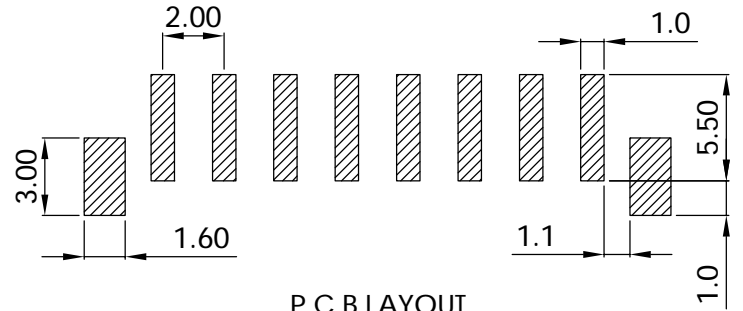
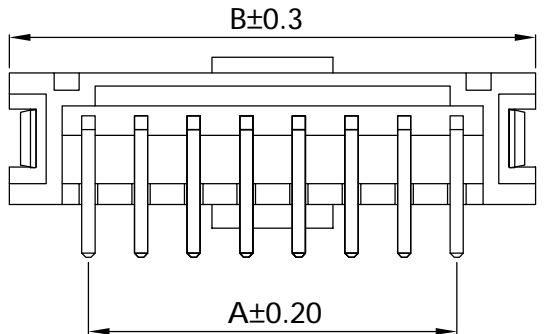
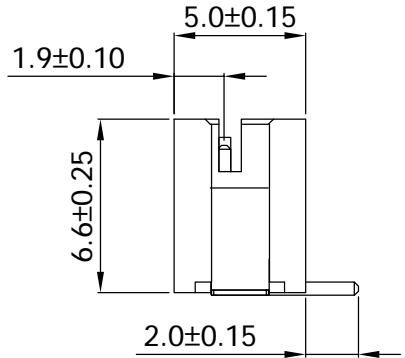
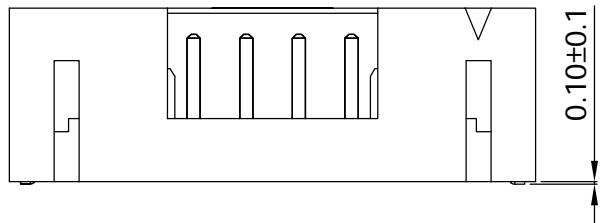


環保物料專用  
RoHS compliant

**SPECIFICATIONS**  
 Current Rating :2A AC,DC  
 Voltage rating :100V AC,DC  
 Temperature range :−25°C~+85°C  
 Contact resistance :20mΩMax  
 Insulation resistance :1000MΩMin  
 Withstanding voltage :800 V AC/minute  
 Pin Material :Brass  
 Finished :Tin-plated  
 Housing Mateial :Nylon-6T,UL94 V -0  
 Color :Black

Circuits	Dimension mm	
	A	B
02	2.00	8.00
03	4.00	10.00
04	6.00	12.00
05	8.00	14.00
06	10.00	16.00
07	12.00	18.00
08	14.00	20.00
09	16.00	22.00
10	18.00	24.00
11	20.00	26.00
12	22.00	28.00
13	24.00	30.00
14	26.00	32.00
15	28.00	34.00
16	30.00	36.00

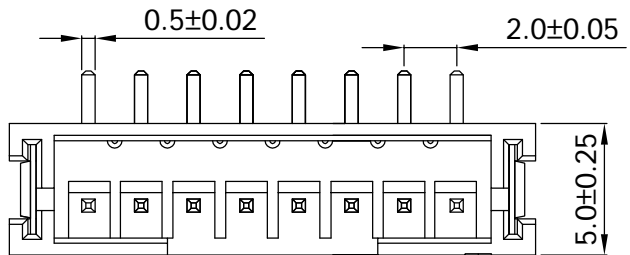

P.C.B LAYOUT



DESCRIPTION(內容):  
2.0mm Wafer 180° SMT

DRAWN(製圖):  
*Tom Liu*

CHECKED(確認):  
*Jack Wu*

APPROVAL(核准):  
*Kane He*


GENERAL TOLERANCE	
LINEAR	ANGLES
X.: ±0.30	X°: ±5.0°
X.X: ±0.20	X.X°: ±3.0°
X.XX: ±0.15	X.XX°: ±2.0°
X.XXX: ±0.10	X.XXX°: ±1.0°

REV:	REV	DESCRIPTION	DATE
A/1	1	ORIGINAL	Aug-16-2019
	2		
	3		
	4		

PART NO:  
(料號) CCP-W20-XX-BK-SMT-R-A  
 DWG NO(圖號): KWRD190816-008

A4

SCALE(比例):  
1:XX



A

B

C

D

E

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Adafruit:](#)

[4389](#) [4390](#) [4391](#) [4392](#)